

Reserve Studies | Insurance Appraisals | Wind Mitigation

COMMERCIAL WINDSTORM MITIGATION REPORT (OIR-B1-1802)

Key Manor Condominium Association, Inc. 3143 28th Ave N, Building G, Units 101-107, 201-207 St. Petersburg, FL 33713



As of 7/22/2019 FPAT File# MUD1913508

FELTEN PROFESSIONAL ADJUSTMENT TEAM 866.568.7853 www.FPATadjusters.com | info@FPATadjusters.com



RECAPITULATION OF MITIGATION FEATURES For 3143 28th Ave N, Building G, Units 101-107, 201-207

1. <u>Building Code:</u> Unknown or does not meet the requirements of Answer A or B

Comments: The year of construction was verified as 1974 per Pinellas County

Property Appraiser.

2. Roof Covering: FBC Equivalent

Comments: The roof covering was replaced in 2003. The roof permit was

confirmed and the permit number is 03-10000081. This roof was verified as meeting the building code requirements outlined on the

mitigation affidavit.

3. Roof Deck Attachment: Other

Comments: Inspection verified a roof deck composed of lightweight concrete

gypsum panels supported by steel bar joists.

4. Roof to Wall Structural

Attachment:

Comments: Inspection verified a roof-wall connection composed of steel bar

joists structurally connected to the wall/support system.

5. Roof Geometry: Flat Roof

Comments: Inspection verified a flat roof shape.

6. SWR: No

Comments: Secondary water resistance does not apply to light weight concrete

roof decks.

7. Opening Protection: None or Some Glazed Openings

Comments: Inspection verified no opening protection.









Exterior Elevation



Roof Construction









Roof Construction





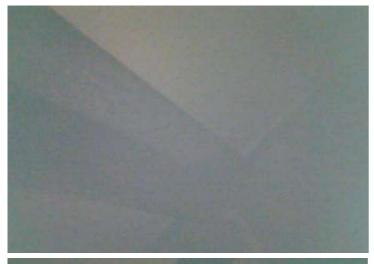





Roof Construction



Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 7/22/2019					
Owner Information					
Owner Name: Key Manor Condominium A	ssociation, Inc.	Contact Person: Jenny Kidd			
Address: 3143 28th Ave N, Building G, Un	Home Phone:				
City: St. Petersburg	Zip: 33713	Work Phone: (727) 726-8000			
County: Pinellas		Cell Phone:			
Insurance Company:	Policy #:				
Year of Home: 1974	# of Stories: 2	Email:			

NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.

	8	•	-	0	0	0		
1.	Building Code :	Was the structure	e built in compli	ance with t	he Florid	a Building	Code (FBC 2001 or later) OR for homes located	in
	the HVHZ (Mian	ni-Dade or Brow	ard counties), So	outh Florida	a Building	g Code (SF	FBC-94)?	
	A. Built in compl	iance with the FE	BC: Year Built .	For home	s built in	2002/2003	provide a permit application with a date after	
	3/1/2002: Bu	uilding Permit Ap	plication Date (M	MM/DD/YYYY)				
[]	B. For the HVHZ	Only: Built in co	ompliance with the	he SFBC-9	4: Year E	Built	For homes built in 1994, 1995, and 1996	
	provide a per	rmit application v	vith a date after 9	9/1/1994: I	Building I	Permit Appl	lication Date (MM/DD/YYYY)//	
[X]] C. Unknown or	does not meet the	e requirements o	f Answer "	'A" or "B	,,		

2. **Roof Covering:** Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified.

2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance
[] 1. Asphalt/Fiberglass Shingle				
[] 2. Concrete/Clay Tile				[]
[] 3. Metal				[]
[X] 4. Built Up			2003	[]
[] 5. Membrane				[]
[] 6. Other				[]

- [X] A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.
- [] B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.
- [] C. One or more roof coverings do not meet the requirements of Answer "A" or "B".
- D. No roof coverings meet the requirements of Answer "A" or "B".
- 3. **Roof Deck Attachment**: What is the weakest form of roof deck attachment?
- [] A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the field. -OR- Batten decking supporting wood shakes or wood shingles. -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.
- [] B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the field.-OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.
- [] C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the field. -OR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width). -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent

Inspectors Initials Property Address 3143 28th Ave N, Building G, Units 101-107, 201-207, St. Petersburg

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

182 psf.	·						
	Concrete Roof Deck.						
[X] E. Other: Ste	X] E. Other: Steel bar joist						
[] F. Unknown o	or unidentified.						
[] G. No attic acc	cess.						
	Attachment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within uside or outside corner of the roof in determination of WEAKEST type)						
[] A. Toe Nails	iside of outside corner of the roof in determination of weaklest type)						
	[] Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or						
	[] Metal connectors that do not meet the minimal conditions or requirements of B, C, or D						
Minimal cond	litions to qualify for categories B, C, or D. All visible metal connectors are:						
	[]Secured to truss/rafter with a minimum of three (3) nails, and						
	[]Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.						
[] B. Clips							
	[] Metal connectors that do not wrap over the top of the truss/rafter, or						
	[] Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail						
	position requirements of C or D, but is secured with a minimum of 3 nails.						
[] C. Single Wraj							
	Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.						
[] D. Double Wr							
	[] Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or [] Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.						
	Anchor bolts structurally connected or reinforced concrete roof.						
[] F. Other:							
[] G. Unknown o							
[] H. No attic acc	cess						
	<u>ry</u> : What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of ure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).						
[] A. Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: ; Total roof system perimeter:						
[X] B. Flat Roof							
[] C. Other Roof							
[] A. SWR (also sheathing							

or greater resistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least

Inspectors Initials Property Address 3143 28th Ave N, Building G, Units 101-107, 201-207, St. Petersburg

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. Opening Protection: What is the weakest form of wind borne debris protection installed on the structure? First, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

	Opening Protection Level Chart			Glazed Openings			
Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure						
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
	Opening Protection products that appear to be A or B but are not verified						
N	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection						

- [] A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).
 - Miami-Dade County PA 201, 202, and 203
 - Florida Building Code Testing Application Standard (TAS) 201, 202, and 203

☐ A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist

- American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
- Southern Standards Technical Document (SSTD) 12
- For Skylights Only: ASTM E 1886 and ASTM E 1996
- For Garage Doors Only: ANSI/DASMA 115

	or X in the table above
	A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
Ex	tterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings
	are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the
	product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for
	"Cyclic Pressure and Large Missile Impact" (Level B in the table above):

☐ A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N,

- ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile 4.5 lb.)
- SSTD 12 (Large Missile 4 lb. to 8 lb.)

[] **B**.

• For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.)

B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist

1 0	·		C		
B.2 One or More Non-Glazed openings classified as Level	l D in the table above,	and no Non-	Glazed openings	classified as Level C	C, N, or X
in the table above					

☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above

C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with plywood/OSE
meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).

moving the requirement of rules roop, rise and respectively.
C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist
C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in

C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials Property Address 3143 28th Ave N, Building G, Units 101-107, 201-207, St. Petersburg

the table above

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

FPAT	File	#MU	019^{4}	135	US

[] N. Exterior Opening Protection (unverified shutter sys						
"B" with no documentation of compliance (Level N		r systems that appear to meet Answer A or				
☐ N.1 All Non-Glazed openings classified as Level A, B, C, o	□ N.1 All Non-Glazed openings classified as Level A, B, C, or N in the table above, or no Non-Glazed openings exist					
 N.2 One or More Non-Glazed openings classified as Level I table above 	N.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level X in the					
☐ N.3 One or More Non-Glazed openings is classified as Leve	el X in the table above					
$[X] \ \underline{\textbf{X. None or Some Glazed Openings}} \ \text{One or more Glazed}$	openings classified and Lev	vel X in the table above.				
MITIGATION INSPECTIONS MUST E Section 627.711(2), Florida Statutes, prov						
Qualified Inspector Name: John Felten	License Type: CBC	License or Certificate #: CBC1255984				
Inspection Company: Felten Professional Adjustment To	eam, LLC.	Phone: 866-568-7853				
Qualified Inspector – I hold an active license as a	: (check one)					
Home inspector licensed under Section 468.8314, Florida Statute training approved by the Construction Industry Licensing Board						
 □ Building code inspector certified under Section 468.607, Florida □ General, building or residential contractor licensed under Section 						
$\hfill \Box$ Professional engineer licensed under Section 471.015, Florida St	atutes.					
☐ Professional architect licensed under Section 481.213, Florida St	atutes.					
Any other individual or entity recognized by the insurer as posses verification form pursuant to Section 627.711(2), Florida Statutes		ons to properly complete a uniform mitigation				
Licensees under s.471.015 or s.489.111 may authorize a direct experience to conduct a mitigation verification inspection. I, am a qualified inspector and contractors and professional engineers only) I had my employand I agree to be responsible for his/her work.	I personally performed the	e inspection or (licensed				
Je At						
Qualified Inspector Signature:Dat	e: <u>7/22/2019</u>					
An individual or entity who knowingly or through gross ness is subject to investigation by the Florida Division of Insural appropriate licensing agency or to criminal prosecution. (Secretifies this form shall be directly liable for the misconduct performed the inspection.	nce Fraud and may be sub ection 627.711(4)-(7), Flor	ject to administrative action by the ida Statutes) The Qualified Inspector who				
Homeowner to complete: I certify that the named Qualified	d Inspector or his or her emp	sloyee did perform an inspection of the				
residence identified on this form and that proof of identification	n was provided to me or my	Authorized Representative.				
Signature:I	Date:					
An individual or entity who knowingly provides or utters a obtain or receive a discount on an insurance premium to who the first degree. (Section 627.711(7), Florida Statutes)						
The definitions on this form are for inspection purposes only and cannot b hurricanes.	oe used to certify any product or	construction feature as offering protection from				

Inspectors Initials Property Address 3143 28th Ave N, Building G, Units 101-107, 201-207, St. Petersburg

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.